


SIGRABOND® Performance

Material: Carbon fiber-reinforced carbon (C/C)
Application: High-temperature applications

Material data of SIGRABOND® Performance

Typical properties	Units	Performance
Density	g/cm ³	1.5
Flexural strength	MPa	300
Flexural modulus	GPa	80
Interlaminar shear strength	MPa	8
Ash content	ppm	1000
Ash content [purified grade]	ppm	< 10
Max. application temperature	°C [°F]	2000 [3600] in vacuum or inert gas

Coefficient of thermal expansion of SIGRABOND Performance

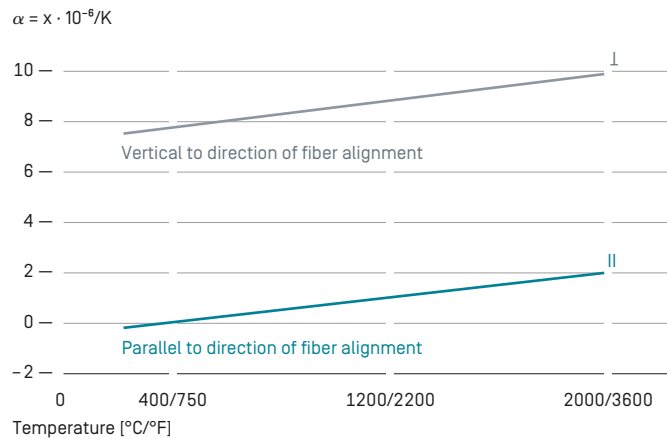

Graphite Materials & Systems | SGL CARBON GmbH
 Sales Europe/Middle East/Africa | cfrc-europe@sglcarbon.com
 Sales Americas | cfrc-americas@sglcarbon.com
 Sales Asia/Pacific | cfrc-asia@sglcarbon.com
 www.cfrc-and-felts.com | www.sglcarbon.com

TDS CFRC-U.00
 09 2018/1.0 E Printed in Germany
 ®registered trademarks of SGL Carbon SE

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".